
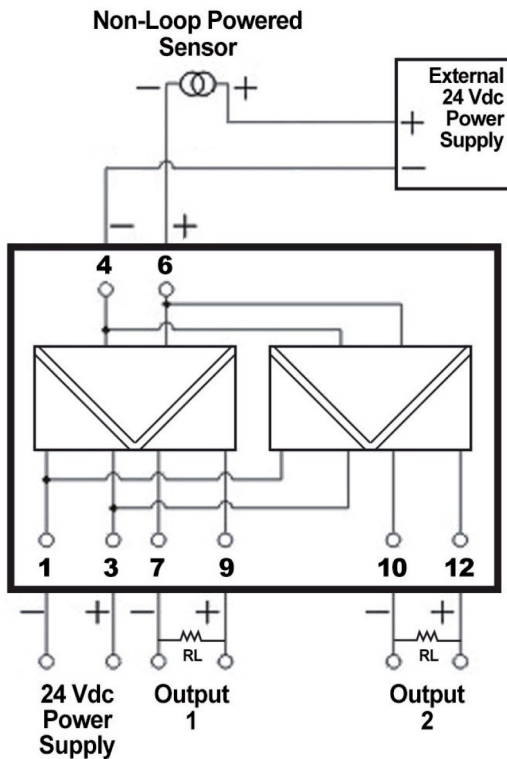


Please Read Before Wiring!

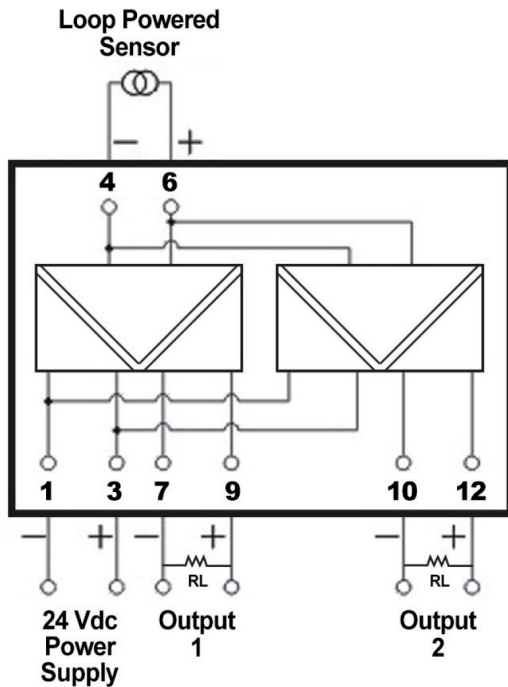

INPUT	
Input Signal	4-20mA
Input Impedance	≤ 100 Ω
OUTPUTS	
Output Signal	4-20mA
Load Resistance	R ≤ 300 Ω
Additional Technical Information	
Power Supply	24 Vdc ± 10%
Power Consumption (24 Vdc Power Supply)	≤ 60mA
Output Accuracy (20°C)	0.5% F.S.
Temperature Drift (-20°C to +60°C)	0.05% F.S./10°
Response Time	≤ 100mS
Dielectric Strength	1500 Vac; 1min
Insulation Resistance (Between Input, Output and Power)	≥ 100M Ω, 500 Vdc
Electromagnetic Compatibility	GB/T 18266(IEC 61326-1)
Ambient Temperature	-20°C to +60 °C
Wire Size	20-14 AWG
Stripping Length	8mm
Dimensions (DxWxH)	99 x 17.5 x 114mm

Please Note:

Output 1: Calibration and Setup Adjustments are made via the potentiometers on top of the module.

Output 2: The module must be opened to access to the potentiometers located on the printed circuit board.

Calibration and Setup Procedure:

- 1.) This module has been calibrated at the factory, do NOT attempt to recalibrate this module unless absolutely required.
- 2.) After connecting the power wires allow the module to warm up a few minutes prior to calibration.
- 3.) Use a grounded screwdriver for adjustments to avoid ESD damage to the circuit.
- 4.) Outputs 1 and 2 are separate from each other; calibrate them one by one.
- 5.) Always start by calibrating ZERO, then SPAN.
- 6.) For both ZERO and SPAN, turn the potentiometer clockwise to increase and counterclockwise to reduce the output.
- 7.) An accurate multimeter is always required to get good measurement results.

Calibration and Setup Procedure Steps:

Step 1: Connect the input signal and the output load as required for the output to be calibrated.

Step 2: Adjust the input signal to precisely 4.00 mA DC (ZERO); then adjust the output zero pot until the output reads precisely 4.000 mA \pm 0.08mA DC.

Step 3: Adjust the input signal to precisely 20.00 mA DC (SPAN); then adjust the output span pot until the output reads precisely 20.000 mA \pm 0.08mA DC.

Step 4: Repeat steps 2 & 3 until the readings converge.

Step 5: Repeat steps 1-4 for the second output's calibration.

Step 6: As a confirmation step for the calibration and setup results, adjust the input current signal to 12.00mA.

Step 7: Confirm that the output value is within the range of 11.94mA and 12.06mA.