



Product Details

Type				
	Supply	IEC-60947-5-1	UL-508	ITH/Thermal Current
Utilization Category	AC	AC-15	A600	10A
	DC	DC-13	P300	
Contact	NO			
Rated Voltage	230V AC	120V AC	24V DC	
Rated Current	6A	6A	1.5A	
Frequency	50-60 Hz			
Electrical Life for Contact / Warranty	1 Million cycle/24 Months**			
Rated Insulation Voltage	600 VAC			
Terminals	Suitable for flexible or solid conductors from 2x1 mm ² to 2x2.5 mm ²			
Current Carrying material	Brass			
HV Test for 60 Sec.	2.5KV (All Terminals Shorted Together)			
Rated Insulation Voltage	600 VAC			
Terminals	Suitable for flexible or solid conductors from 2x1 mm ² to 2x2.5 mm ²			
Current Carrying Material	Brass			
Contact material	AgNi			
Contact Type	Make & Break			
Contact Material	AgNi			
Contact Resistance	20 mΩ			
mV drop at 16 A DC	200 mV			
Type	Non Illuminated / Illuminated			
Function	Push, Push - Push, Push turn, Selector			
Available Colours	Red / Green / Black / Yellow / White / Blue / Orange			
Disposition of Contact				
International Approvals	CE, UL			

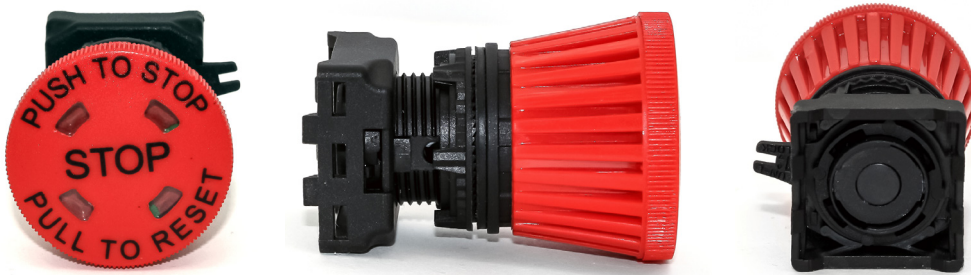


Key Features:


- Push to Stop, Pull to Reset Operation – Instant emergency shutdown with a manual reset function.
- 22.5mm Red Mushroom Button with Visual Indicator – Provides clear and highly visible status indication.
- Isolated terminals for NO+NC Application
- Current rating of 6A at 240V AC
- IP 20 terminal Protection & IP 65
- Electrical operation 0.5 million at rated voltage, mechanical life of 1 million operations



Drawings

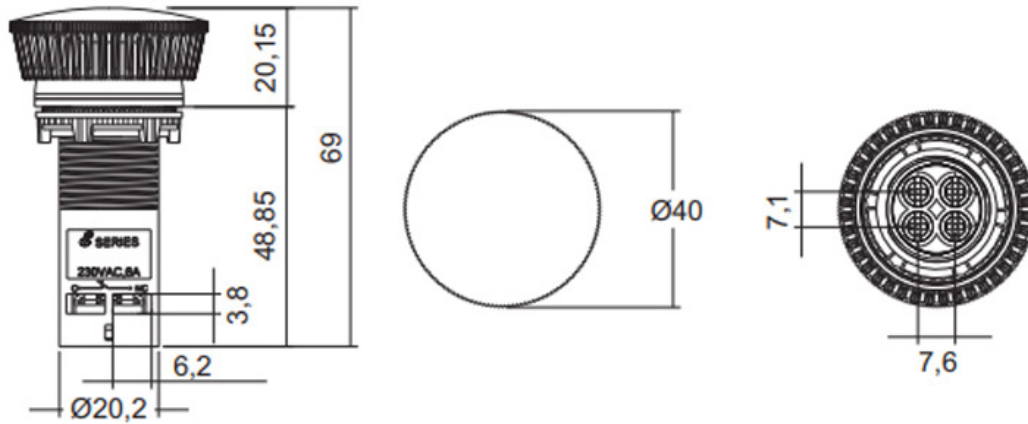

Contacts

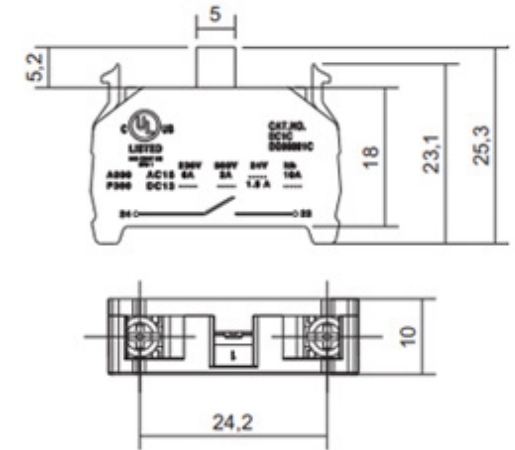

Key Features:

- Snap mounting with compact contact blocks (EC1C & EC2C)
- Stackable design for Contact Block
- Electrical life more than 0.5 million and mechanical life more than 1.0 million
- Passes surge test 2kV & HV test of 1.5kV
- IP 20 terminal protection
- Available in screw type/cage clamp – screw less/PCB mounted

