


Tapered blades and streamlined handles. Shape of the blades optimizes cutting of conductors with minimum effort. Handles have crimping die for ferrules and other crimp terminals up to 10 AWG.

Cutting Range up to 1/0 AWG



Microteeth

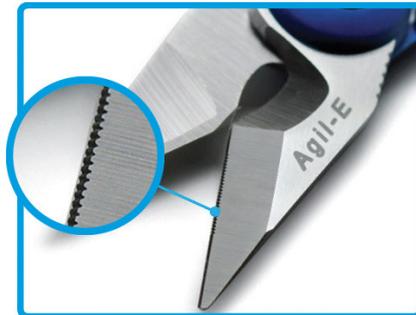

Anti-loosening pivot



Dual-compound streamlined handles



Case with belt fastening system

