




Insulated Ferrules Single Wire Entry


For applications where a ferrule is required. A complete series of single wire insulated ferrules are available. The ferrules are manufactured in electrolytic tin-plated copper and polypropylene insulated.

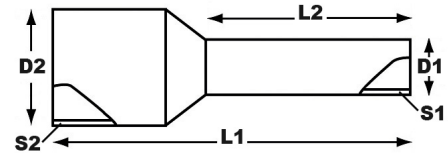

SINGLE WIRE ENTRY										
ORDER INFORMATION					DIMENSIONS (mm)					
Wire Size (AWG)	Order Number	Type	Color	Package Size	D1	D2	L1	L2	S1	S2
22-20	WP30002	WP5-14	White	500	1	2.6	14	8	0.15	0.25
18	WP30005	WP75-14	Gray	500	1.2	2.8	14	8	0.15	0.25
18	WP30009	WP1-14	Red	500	1.4	3	14	8	0.15	0.25
16	WP30013	WP15-14	Black	500	1.7	3.5	14	8	0.15	0.25
14	WP30016	WP25-14	Blue	500	2.2	4.2	14	8	0.15	0.25
12	WP30019	WP40-16	Gray	500	2.8	4.8	17	10	0.2	0.3
10	WP30022	WP60-20	Yellow	100	3.5	6.3	20	12	0.2	0.3
8	WP30024	WP100-21	Red	100	4.5	7.6	22	12	0.2	0.4
6	WP30026	WP160-22	Blue	100	5.8	8.8	24	12	0.2	0.4
4	WP30028	WP250-29	Yellow	50	7.3	11.2	30	16	0.2	0.4
2	WP30030	WP350-30	Red	50	8.3	12.7	30	16	0.2	0.4
1/0	WP30032	WP500-40	Blue	50	10.3	15	36	20	0.3	0.5

Insulated Ferrules Double Wire Entry

The double wire entry ferrules are manufactured in electrolytic tin-plated copper and insulated in special polyamide, suited for high temperatures (+110° C).

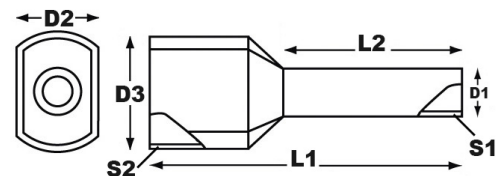

DOUBLE WIRE ENTRY											
ORDER INFORMATION					DIMENSIONS (mm)						
Wire Size (AWG) 2x	Order Number	Type	Color	Package Size	D1	D2	D3	L1	L2	S1	S2
22-20	WP90001	WPD05-15	White	500	1.5	2.5	4.7	15.7	8.7	0.15	0.3
18	WP90002	WPD75-15	Gray	500	1.8	2.8	5	15.5	8.9	0.15	0.3
18	WP90003	WPD01-15	Red	500	2.3	3.2	5.5	15.8	8	0.15	0.3
16	WP90004	WPD15-16	Black	500	2.3	3.5	6.5	16	8	0.15	0.3
14	WP90005	WPD25-18	Blue	500	2.9	4.3	7.5	18.3	10	0.2	0.4
12	WP90006	WPD04-23	Gray	500	3.8	4.9	8.8	23.3	12.5	0.2	0.4