



- 3-phase 400-500 Vac input or 2-phase with derating
- Short circuit, overload, input and output overvoltage protections
- Over temperature protection
- Suitable for applications that require high reliability and performance
- Smart alarm contact, signals when output voltage drops more than 10%
- High overload capability to ensure the protections selectivity and start-up of heavy loads

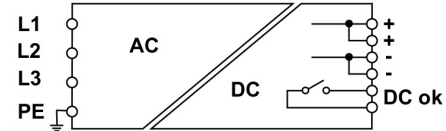

**NOTE**

Please refer to the datasheet for more details  
Above overcurrent limit, the protection starts cycling in ON/OFF mode (hiccup autoreset), the maximum current supplied depends by the line resistance

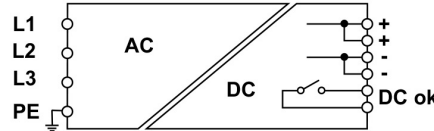

CODE	XCSG720C	XCSG960C
<b>TYPE</b>	<b>CSG720C</b>	<b>CSG960C</b>
<b>INPUT TECHNICAL DATA</b>		
Input rated voltage	3x 400-500 Vac	3x 400-500 Vac
Input voltage AC	340...550 Vac	340...550 Vac
Input voltage DC	—	—
Frequency	47...63 Hz	47...63 Hz
Current consumption	1.4 A (400 Vac) / 1.1 A (500 Vac)	2.2 A (400 Vac) / 1.1 A (500 Vac)
Inrush peak current	30 A	20 A
Power factor	> 0.75	> 0.65
Internal protection fuse	—	—
External protection on AC line	MCB: C-10 A / Fuse: T-10 A	MCB: C-10 A / Fuse: T-10 A
<b>OUTPUT TECHNICAL DATA</b>		
Output rated voltage	24 Vdc ±1%	24 Vdc ±1%
Output adjustable range	24...28 Vdc	24...28 Vdc
Continuous current	30 A at 50°C	40 A at 50°C
Overload limiting	45 A for > 5 s	44 A for > 5 s
Short circuit peak current	60 A for 1.5 s	63 A for 5 s
Ripple @ nominal ratings	100 mVpp	100 mVpp
Hold up time	10 ms (400 Vac) / 15 ms (500 Vac)	10 ms (400 Vac) / 15 ms (500 Vac)
Status indication	LED "DC OK" / LED "Alarm"	LED "DC OK" / LED "Alarm"
Alarm contact	dry contact, max. 1A @ 24 Vdc (Uout > 21.6 Vdc)	dry contact, max. 1A @ 24 Vdc (Uout > 21.6 Vdc)
Parallel connection	possible	possible
Redundant parallel connection	possible with external ORING diode	possible with external ORING diode
<b>GENERAL TECHNICAL DATA</b>		
Efficiency	92% (400 Vac) / 92% (500 Vac)	92% (400 Vac) / 92% (500 Vac)
Dissipated power	60 W (400 Vac) / 60 W (500 Vac)	80 W (400 Vac) / 80 W (500 Vac)
Operating temperature range	-20...+60°C	-20...+60°C (derating -18 W > 45°C)
Input / output isolation	3 kVac / 60 s (SELV output)	3 kVac / 60 s (SELV output)
Input / ground isolation	2 kVac / 60 s	2 kVac / 60 s
Output / ground isolation	0.5 kVac / 60 s	0.5 kVac / 60 s
Standard / approvals	EN 60950-1	EN 60950-1
EMC Standards	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4
Overvoltage category / Pollution degree	II / 2	II / 2
Protection degree	IP 20	IP 20
Connection terminal IN/OUT	4 mm <sup>2</sup> / 4 mm <sup>2</sup>	4 mm <sup>2</sup> / 10 mm <sup>2</sup>
Housing material	aluminium	aluminium
Dimension	80x139x127 mm	80x139x127 mm
Approximate weight	1.3 Kg	1.2 kg
Mounting information	vertical on a rail, 10 mm from adjacent components	vertical on a rail, 10 mm from adjacent components
<b>APPROVALS</b>	CE	CE
<b>ACCESSORIES</b>		
Mounting rail (IEC60715/TH35-7.5)	PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB	PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB
Mounting rail (IEC60715/TH35-15)	PR/3/PP, PR/3/PP/ZB, PR/3/PA, PR/3/PA/ZB	PR/3/PP, PR/3/PP/ZB, PR/3/PA, PR/3/PA/ZB
Marking tag	TAP207A, TAP128A, TAP178A, TAP209A	TAP207A, TAP128A, TAP178A, TAP209A