





Your Source for Automation Components

- Single phase, 2-phase and 3-phase input
- Short circuit, overload, input and output overvoltage protections
- Over temperature protection
- Suitable for applications that require high reliability and performance
- Smart alarm contact, signals when output voltage drops more than 10%
- High overload capability to ensure the protections selectivity and start-up of heavy loads

NOTE

Please refer to the datasheet for more details

Above overcurrent limit, the protection starts cycling in ON/OFF mode [hiccup autoreset], the maximum current supplied depends by the line resistance

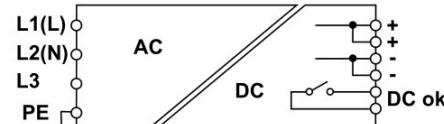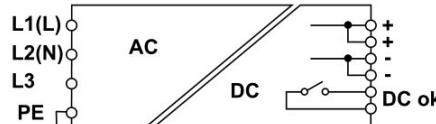

CODE TYPE	CSW241C	XCSW241C	CSW241B	XCSW241B
INPUT TECHNICAL DATA				
Input rated voltage	1-2-3x 230-400-500 Vac		1-2-3x 230-400-500 Vac	
Input voltage AC	185...550 Vac		185...550 Vac	
Input voltage DC	270...770 Vdc		270...770 Vdc	
Frequency	47...63 Hz		47...63 Hz	
Current consumption	2 A (230 Vac) / 1 A (400 Vac)		2 A (230 Vac) / 1 A (400 Vac)	
Inrush peak current	20 A		20 A	
Power factor	> 0.65		> 0.65	
Internal protection fuse	—		—	
External protection on AC line	MCB: C-6 A / Fuse: T-6.3 A		MCB: C-6 A / Fuse: T-6.3 A	
OUTPUT TECHNICAL DATA				
Output rated voltage	24 Vdc ±1%		12 Vdc ±1%	
Output adjustable range	24...27.5 Vdc		12...15 Vdc	
Continuous current	10 A at 50°C		16 A (12 Vdc) - 15A (15 Vdc)	
Overload limiting	15 A for >6 s		20...18 A for >6 s	
Short circuit peak current	38 A for 0.5 s		34 A for 0.5 s	
Ripple @ nominal ratings	100 mVpp		100 mVpp	
Hold up time	15 ms (230 Vac) / 100 ms (400 Vac)		15 ms (230 Vac) / 100 ms (400 Vac)	
Status indication	LED "DC OK" / LED "Alarm"		LED "DC OK" / LED "Alarm"	
Alarm contact	dry contact, max. 1A @ 24 Vdc (Uout >21.6 Vdc)		dry contact, max. 1A @ 24 Vdc (Uout >10.8 Vdc)	
Parallel connection	possible		possible	
Redundant parallel connection	possible with external ORing diode		possible with external ORing diode	
GENERAL TECHNICAL DATA				
Efficency	91% (230 Vac) / 92% (400 Vac)		89% (230 Vac) / 90% (400 Vac)	
Dissipated power	24 W (230 Vac) / 21 W (400 Vac)		22 W (230 Vac) / 20 W (400 Vac)	
Operating temperature range	-20...+60°C (derating -3 W >50°C)		-20...+60°C (derating -3 W >50°C)	
Input / output isolation	3 kVac / 60 s (SELV output)		3 kVac / 60 s (SELV output)	
Input / ground isolation	2 kVac / 60 s		2 kVac / 60 s	
Output / ground isolation	0.5 kVac / 60 s		0.5 kVac / 60 s	
Standard / approvals	EN 60950-1		EN 60950-1	
EMC Standards	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4		EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4	
Overvoltage category / Pollution degree	II / 2		II / 2	
Protection degree	IP 20		IP 20	
Connection terminal IN/OUT	2.5 mm² / 2.5 mm²		2.5 mm² / 2.5 mm²	
Housing material	aluminium		aluminium	
Dimension	55x130x115 mm		55x130x115 mm	
Approximate weight	1 kg		1 kg	
Mounting information	vertical on a rail, 10 mm from adjacent components		vertical on a rail, 10 mm from adjacent components	
APPROVALS				
CE			CE	
ACCESSORIES				
Mounting rail (IEC60715/TH35-7.5)	PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB		PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB	
Mounting rail (IEC60715/TH35-15)	PR/3/PP, PR/3/PP/ZB, PR/3/PA, PR/3/PA/ZB		PR/3/PP, PR/3/PP/ZB, PR/3/PA, PR/3/PA/ZB	

Compact DIN Rail Mount Power Supply



Your Source for Automation Components

Compact DIN Rail Mount Power Supply


- Single phase, 2-phase and 3-phase input
- Short circuit, overload, input and output overvoltage protections
- Over temperature protection
- Suitable for applications that require high reliability and performance
- Smart alarm contact, signals when output voltage drops more than 10%
- High overload capability to ensure the protections selectivity and start-up of heavy loads

NOTE

Please refer to the datasheet for more details

Above overcurrent limit, the protection starts cycling in ON/OFF mode(hiccup autoreset), the maximum current supplied depends by the line resistance

Until stocks are exhausted

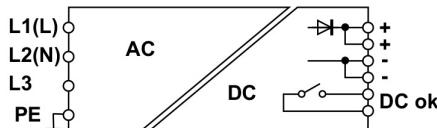

CODE	XCSW241DP
TYPE	CSW241DP
INPUT TECHNICAL DATA	
Input rated voltage	1-2-3x 230-400-500 Vac
Input voltage AC	185...550 Vac
Input voltage DC	270...770 Vdc
Frequency	47...63 Hz
Current consumption	2 A (230 Vac) / 1 A (400 Vac)
Inrush peak current	20 A
Power factor	> 0.65
Internal protection fuse	—
External protection on AC line	MCB: C-6 A / Fuse: T-6.3 A
OUTPUT TECHNICAL DATA	
Output rated voltage	48 Vdc ±1%
Output adjustable range	45...55 Vdc
Continuous current	5 A at 50°C
Overload limiting	6 A for >6 s
Short circuit peak current	18 A for 0.5 s
Ripple @ nominal ratings	100 mVpp
Hold up time	15 ms (230 Vac) / 100 ms (400 Vac)
Status indication	LED "DC OK" / LED "Alarm"
Alarm contact	dry contact, max. 1A @ 24 Vdc (Uout >43.2 Vdc)
Parallel connection	possible
Redundant parallel connection	already fitted with internal ORing diode
GENERAL TECHNICAL DATA	
Efficency	91% (230 Vac) / 92% (400 Vac)
Dissipated power	24 W (230 Vac) / 21 W (400 Vac)
Operating temperature range	-20...+60°C (derating -3 W >50°C)
Input / output isolation	3 kVac / 60 s (SELV output)
Input / ground isolation	2 kVac / 60 s
Output / ground isolation	0.5 kVac / 60 s
Standard / approvals	EN 60950-1
EMC Standards	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4
Overvoltage category / Pollution degree	II / 2
Protection degree	IP 20
Connection terminal IN/OUT	2.5 mm² / 2.5 mm²
Housing material	aluminium
Dimension	55x130x115 mm
Approximate weight	1 kg
Mounting information	vertical on a rail, 10 mm from adjacent components
APPROVALS	
ACCESSORIES	
Mounting rail [IEC60715/TH35-7.5]	PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB
Mounting rail [IEC60715/TH35-15]	PR/3/PP, PR/3/PP/ZB, PR/3/PA, PR/3/PA/ZB