





Ring Lug Terminal Block ASI391003

The ASI391003 is a NEMA style ring lug terminal block with a UL rating of 20A, 600V. The ring terminal M3.5 screw size accepts wires terminated directly under the rectangular flat washer or wires equipped with ring, fork or spade lugs. The modular DIN rail mounting of the ASI391003 9.5mm wide NEMA style terminal block allows for assembling any number of circuits together. The center of the barrier strip type NEMA terminal block is designed to accept a snap in label for easy visual circuit identification. Other models of the NEMA style DIN rail mount terminal block include up to 309A, double level, and sliding link disconnect.

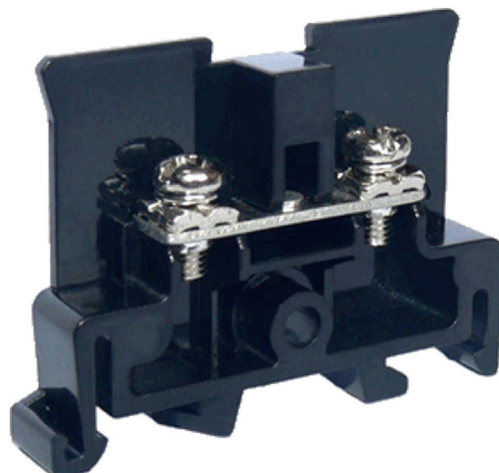

	Certifications	
		
	Specifications	
	Terminal Screw Thread Type	M3.5
	Terminal Screw Thread Length	8mm
	Torque	9 - 11 Lb-In
	Wire Size (AWG):	#18 - #12 Sol/Str
	Current Rating:	20A
	Voltage Rating:	600V
	Dimensions (HxWxD):	29x9.5x40mm
	Accessories:	
	Plug-In Jumpers:	
	2 pos	ASI393013
	3 pos	ASI393014
	4 pos	ASI393015
	5 pos	ASI393016
	6 pos	ASI393017
	10 pos	ASI393018
	End Bracket:	ASI392001
	DIN Rail (2 meters)	
	7.5 x 35mm slotted	
	7.5 x 35mm non-slotted	
	15 x 35mm slotted	
	15 x 35mm non-slotted	
	Labels	ASI394006