


- Screw Clamp DIN Rail Mount Terminal Block
- Top Level: Sensor/Actuator Signal Feed-Through
- Third Level: Sensor Power (-) Feed-Through
- Second Level: Sensor/Actuator Power (+) Feed-Through
- Bottom Level: Actuator Ground

DIMENSIONS

Depth x Width x Height: 82.5 x 6.2 x 69.5 mm
(3.248 x 0.244 x 2.126")

TECHNICAL PARAMETERS

Parameter:	Data
Layers:	4
Number of Connections:	7
Rated Cross Section (mm ²):	4 mm ² , #12 AWG
Color:	Gray
Insulation material:	PA
Flame retardant grade (UL94)	V0
Rated Voltage:	400 V
Rated Current:	26 A
Temperature of insulation material:	-40°C~+125°C
Wire Feed:	Both sides of the terminal

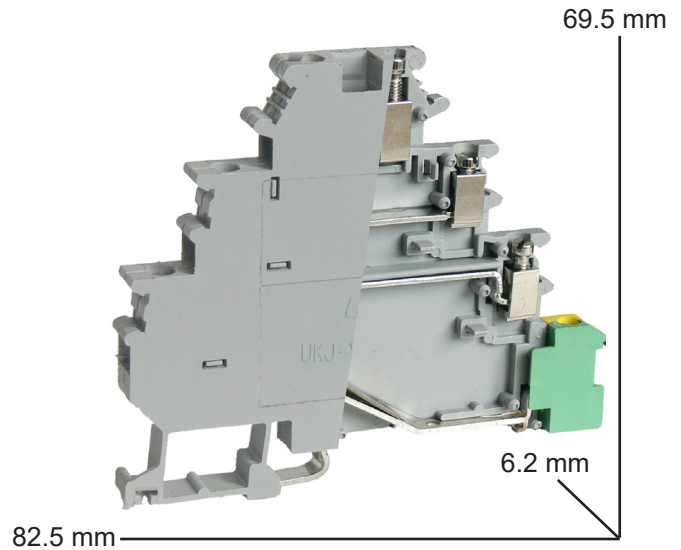

ACCESSORIES



External Side Entry Bridge:
 ASIEB10DIKRD-10 pos. Red
 ASIEB80DIKRD-80 pos. Red
 ASIEB10DIKBU-10 pos. Blue
 ASIEB80DIKBU-80 pos. Blue



ASIFBI106N-Screw-In Internal Jumper, 10 pos.

ASIZB610B-Blank Markers, 10 pos.