





Product designation			Monoblock potentiometers
Product type designation			LPCPA
General characteristics			
Type of positions			Potentiometer
Resistance value			KΩ 10
Material			Polyamide - Resistive material: cermet
IEC degree of protection			IP66, IP67; IP96K on front and IP20 on rear
Electrical characteristics			
Rated insulation voltage Ui IEC/EN			V 250VAC
Rated impulse withstand voltage Uimp			kV 4
Max power			W 1
Mechanical features			
Mechanical travel			° 290
Weight			g 40
UL technical data			
UL degree of protection			1, 2, 3R, 4, 4X, 12, 12K on front
Ambient conditions			
Temperature			
Operating temperature			
			min °C -25
			max °C +70
Storage temperature			
			min °C -40
			max °C +85
Resistance & Protection			
Resistance tolerance			% ±10%
Dimensions			

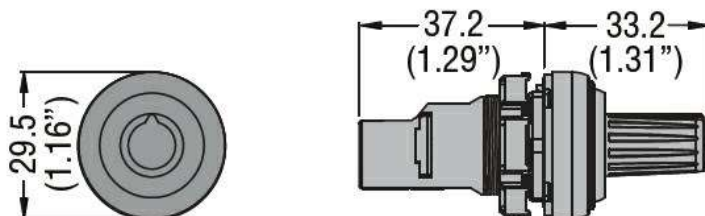

Wiring diagrams

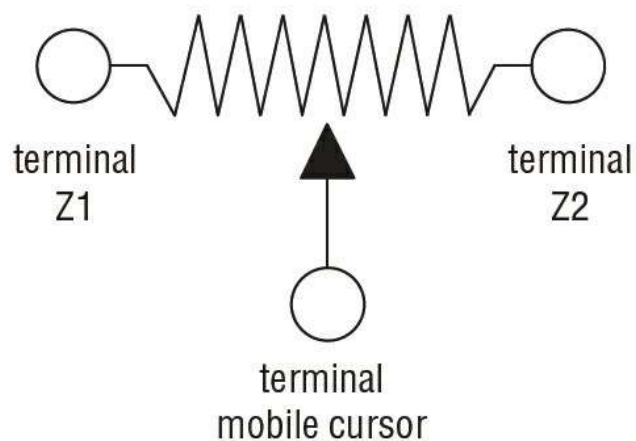

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC001027 -
Potentiometer for
command
devices