





Product designation			Monoblock potentiometers	
Product type designation			LPCPA	
General characteristics				
Type of positions			Potentiometer	
Resistance value			KΩ	2.5
Material			Polyamide - Resistive material: cermet	
IEC degree of protection			IP66, IP67; IP96K on front and IP20 on rear	
Electrical characteristics				
Rated insulation voltage Ui IEC/EN			V	250VAC
Rated impulse withstand voltage Uimp			kV	4
Max power			W	1
Mechanical features				
Mechanical travel			°	290
Weight			g	40
UL technical data				
UL degree of protection			1, 2, 3R, 4, 4X, 12, 12K on front	
Ambient conditions				
Temperature				
Operating temperature			min	°C -25
			max	°C +70
Storage temperature			min	°C -40
			max	°C +85
Resistance & Protection				
Resistance tolerance			%	±10%
Dimensions				

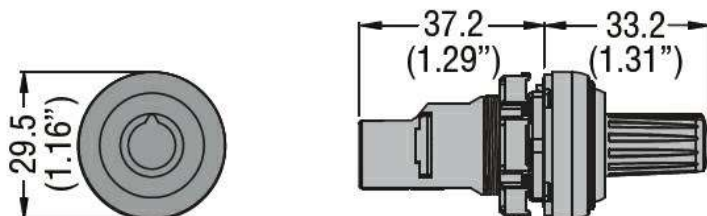

Wiring diagrams

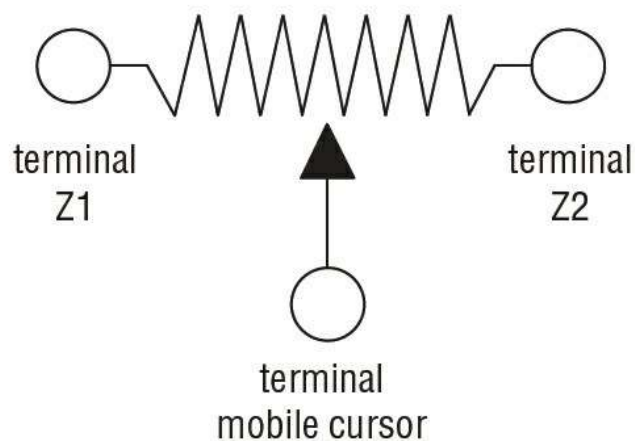

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC001027 -
Potentiometer for
command
devices