

Technical Specifications:

• Voltage Rating: 250V AC

• Current Rating: 6.3A

• Poles: 1 Pole

• Contact Resistance: 5/10 mOhm Max

• Material Insulator: PA6/66

• Flammability Rating: UL94 VO

• Operating Temperature: -30°C to 120°C

• Color: Green

• Shocksafe Category: PC1


Mechanical Fuse-Link: 5 x 20mm


• Mount: PCB Mount

• Pitch: 15mm

• Termination: PC Pins

• Optional Cover: BS232

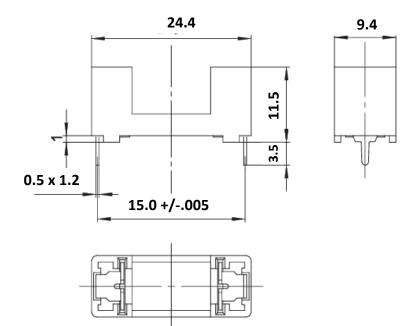



PCB LAYOUT - COMPONENT VIEW



The ASI PTF-76 is a PCB-mount fuse holder designed to accept standard 5 x 20mm glass or ceramic fuses. Engineered for 250V circuits with a 15mm pin pitch, it features a compact through-hole mount design, making it ideal for power supplies, control boards, or compact electronics where space and safety matter. Compatible with both glass and ceramic fuse types, this UL-compliant holder offers a reliable and cost-effective solution for circuit protection on printed circuit boards.