
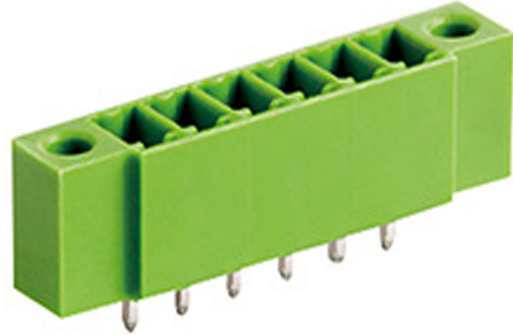


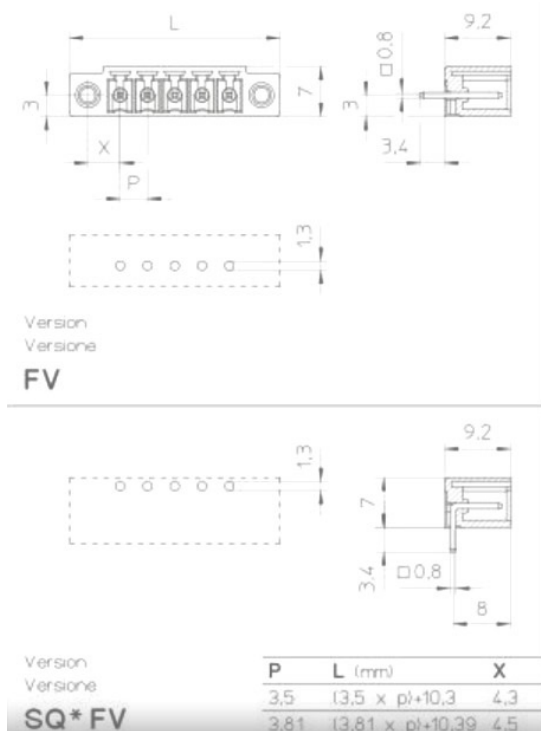

Certifications	
Material	
Pin/plate	Copper Alloy, Tin plated
Housing	PA66 UL94V-0, Green
Electrical	
Standard	UL1059/CSA C22.2 No.158
Rated Voltage	150V
Rated Current	12A
Contact Resistance	20mΩ
Insulation resistance	500MΩ/500 Vdc
Withstand Voltage	2000 Vac/1Min
Mechanical	
Temperature range	-30°C~+120°C
Size	
Pitch	3.5/3.81mm
Poles	2P-20P

Item	Positions	Length (mm) 3.5/3.81
MRT9P3.5/3.81-2FV	2	17.3 / 18.01
MRT9P3.5/3.81-3FV	3	20.8 / 21.82
MRT9P3.5/3.81-4FV	4	24.3 / 25.63
MRT9P3.5/3.81-5FV	5	27.8 / 29.44
MRT9P3.5/3.81-6FV	6	31.3 / 33.25
MRT9P3.5/3.81-7FV	7	34.8 / 37.06
MRT9P3.5/3.81-8FV	8	38.3 / 40.87
MRT9P3.5/3.81-9FV	9	41.8 / 44.68
MRT9P3.5/3.81-10FV	10	45.3 / 48.49
MRT9P3.5/3.81-11FV	11	48.8 / 52.3
MRT9P3.5/3.81-12FV	12	52.3 / 56.11
MRT9P3.5/3.81-13FV	13	55.8 / 59.92
MRT9P3.5/3.81-14FV	14	59.3 / 63.73
MRT9P3.5/3.81-15FV	15	62.8 / 67.54
MRT9P3.5/3.81-16FV	16	66.3 / 71.35
MRT9P3.5/3.81-17FV	17	69.8 / 75.16
MRT9P3.5/3.81-18FV	18	73.3 / 78.97
MRT9P3.5/3.81-19FV	19	76.8 / 82.78
MRT9P3.5/3.81-20FV	20	80.3 / 86.59