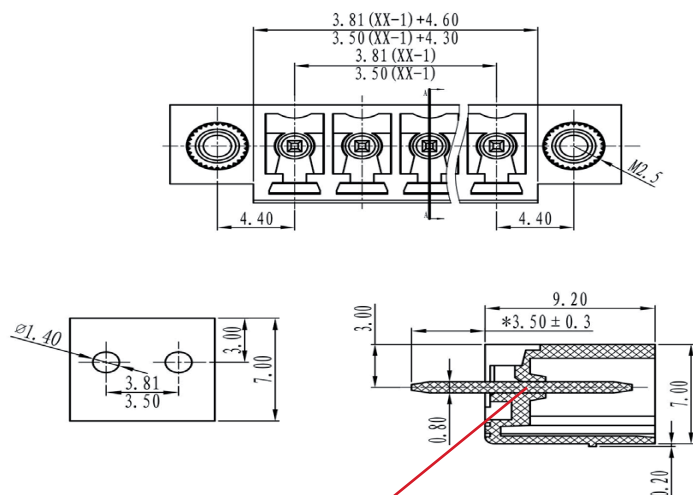


All Pins have 8 Barbs Each.

Item	Positions	Length (mm)
ASIWJ15EDGVM-3.5-2P	2	17.2
ASIWJ15EDGVM-3.5-3P	3	20.7
ASIWJ15EDGVM-3.5-4P	4	24.2
ASIWJ15EDGVM-3.5-5P	5	27.7
ASIWJ15EDGVM-3.5-6P	6	31.2
ASIWJ15EDGVM-3.5-7P	7	34.7
ASIWJ15EDGVM-3.5-8P	8	38.2
ASIWJ15EDGVM-3.5-9P	9	41.7
ASIWJ15EDGVM-3.5-10P	10	45.2
ASIWJ15EDGVM-3.5-11P	11	48.7
ASIWJ15EDGVM-3.5-12P	12	52.2
ASIWJ15EDGVM-3.5-13P	13	55.7
ASIWJ15EDGVM-3.5-14P	14	59.2
ASIWJ15EDGVM-3.5-15P	15	62.8
ASIWJ15EDGVM-3.5-16P	16	66.2
ASIWJ15EDGVM-3.5-17P	17	69.7
ASIWJ15EDGVM-3.5-18P	18	73.2
ASIWJ15EDGVM-3.5-19P	19	76.7
ASIWJ15EDGVM-3.5-20P	20	80.2
ASIWJ15EDGVM-3.5-21P	21	83.7
ASIWJ15EDGVM-3.5-22P	22	87.2
ASIWJ15EDGVM-3.5-23P	23	90.7
ASIWJ15EDGVM-3.5-24P	24	94.2

Certifications	
Material	
Pin/Plate	Sn Plated
Housing	PA66, UL94V-0
Electrical	
Rated Voltage	300 V
Rated Current	8 A
Withstand Voltage	1.6KV
Mechanical	
Temperature Range [C]	-40 ~+105
Size	
Pitch	3.5
Poles	2 - 24