


THERMAL TRANSFER SYSTEM FOR ROLL MEDIA

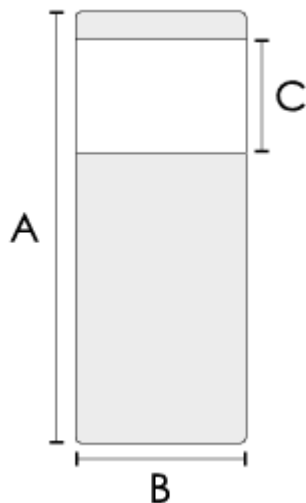

KM-ROLL wraparound cable markers are suitable for identifying wire or cable cables, tubes and conduit. The increased thickness of the label improves the handling and flexibility of the material, facilitating its application on the cable

Material: Polyolefin PO99006TR, UL969 approved, Silicon free, Halogen free

Operating temperature range: -94°F to +284°F

Application temperature range: +50°F to +104°F

<div> <div>PO</div> <div>HF</div> <div>SF</div> <div>-94°F</div> <div>+284°F</div> <div>RoHS</div> <div>RoHS</div> <div></div> <div></div> <div></div> <div></div> </div>										
Family	Overall length A mm	Cable range AWG	Wrapping diameter mm	Print area Cx B mm	Type		Columns	Rows	Quantity	SW code
					white	yellow				
KM-ROLL019	19	20 - 16	2 - 3	9 x 13	61962-013N	61462-013N	5	1,400	7,000	4612
KM-ROLL025	25	18 - 12	2.6 - 4.1	9 x 15	61955-015N	61455-015N	5	1,700	8,500	4600
				9 x 23	61955-023N	61455-023N	4	1,700	6,800	4601
KM-ROLL038	38	10 - 8	4.3 - 7	10 x 15	61950-015N	61450-015N	5	1,200	6,000	4602
				10 x 23	61950-023N	61450-023N	4	1,200	4,800	4603
KM-ROLL050	50	8 - 2	6 - 10	15 x 15	61951-015N	61451-015N	5	900	4,500	4604
				15 x 23	61951-023N	61451-023N	4	900	3,600	4605
KM-ROLL062	62	6 - 2	6.5 - 12	18 x 12	61958-012N		6	834	5,000	4652
				12 - 13	61958-038N		2	750	1,500	4614
KM-ROLL067	67	6 - 1	6.5 - 14.5	20 x 72	61966-072N	61466-072N	1	700	700	4613
KM-ROLL068	68	6 - 1	7 - 13	22 x 40	61959-040N		2	750	1,500	4654
KM-ROLL075	75	4 - 1/0	8 - 14	25 x 15	61952-015N	61452-015N	5	600	3,000	4606
				25 x 23	61952-023N	61452-023N	4	600	2,400	4607
KM-ROLL080	80	2 - 3/0	10 - 17	25 x 47	61964-047N	61464-047N	2	625	1,250	4660
KM-ROLL092	92	1 - 250 MCM	11 - 19	20 x 80	61965-080N	61465-080N	1	500	500	4661
KM-ROLL100	100	1/0 - 300 MCM	12 - 20	25 x 15	61953-015N	61453-015N	5	480	2,400	4608
				25 x 23	61953-023N	61453-023N	4	480	1,920	4609
			13 - 21	25 x 50	61953-050N	61453-050N	2	500	1,000	4616
				32 x 38	61953-038N	61453-038N	2	500	1,000	4615
KM-ROLL135	135	300 - 500 MCM	20 - 25	25 x 15	61954-015N	61454-015N	5	350	1,750	4610
				25 x 23	61954-023N	61454-023N	4	350	1,400	4611

Datasheet